



1. Names and Parts

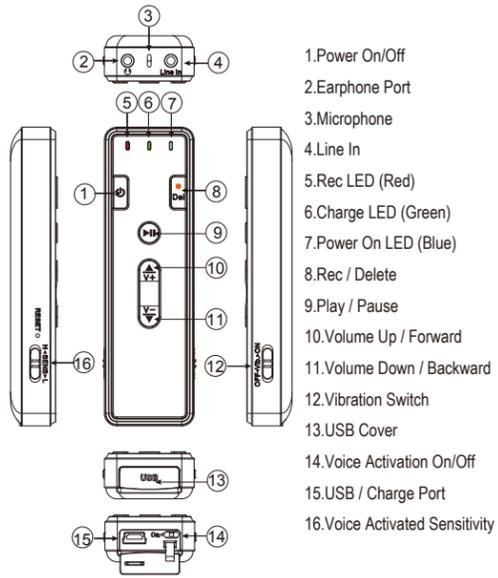

(1)

2. Package Content

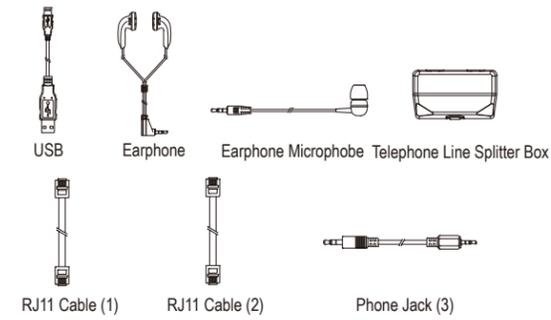


3. Charging the Battery

1. Open the USB cover ①
2. With the unit powered off, connect the supplied USB cable to the USB port on the base of the device. ②
3. Connect the other end of the USB cable to a computer. ③
4. The green LED ④ turns on during charging.
5. To fully charged the device, it takes about 3-4 hours. When the device is completely charged, the green LED turns off.

(2)

4. Continue Recording & Voice Activation Recording (VOX)



◆ Continue Recording


1. Press and hold the power on button ① for 3 seconds then the blue LED ⑦ turns on. After 7 seconds, the blue LED blinks for 3 times. The device is on standby mode.
2. Press Rec button ⑧ The red LED ⑤ turns on when recording. To activate vibration mode, slide the switch to ON. ⑫ (The vibration mode is suggested for discreet recordings.)
3. To stop recording, press again Rec button and the red LED turns off.
4. When battery is fully charged, a continued recording time is about 28 hours.

◆ Voice Activation Recording (VOX)

1. Open the USB cover ⑬ and slide the voice activation switch ⑭ to ON. Then select the voice activation sensitivity. ⑮ (It is suggested Low sensitivity for distance within 2 to 3 meters)
2. Follow the continue recording steps to start recording.
3. Voice activation recording time is about 80 hours.

(3)


5. Microphone Recording (Cellphone Conversation Recording)

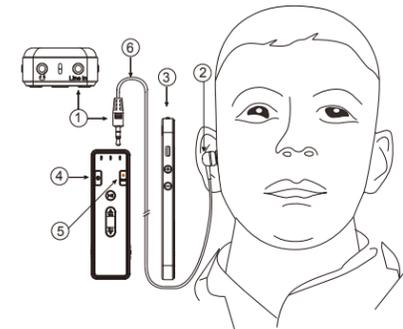

1. Connect the supplied microphone ⑥ to Line In port ①
- Refer to illustration above, place the microphone to your ear first.
2. When answering incoming calls, place the cellphone ③ on top of the mic. ②
3. Power on the device ④ and press the Rec button. ⑤

(4)

6. Telephone line in recording

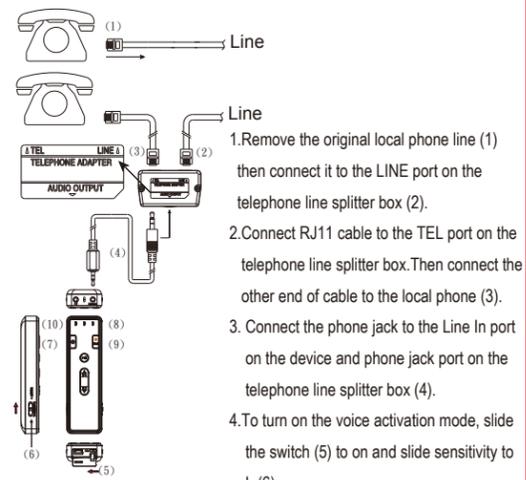


1. Remove the original local phone line (1) then connect it to the LINE port on the telephone line splitter box (2).
2. Connect RJ11 cable to the TEL port on the telephone line splitter box. Then connect the other end of cable to the local phone (3).
3. Connect the phone jack to the Line In port on the device and phone jack port on the telephone line splitter box (4).
4. To turn on the voice activation mode, slide the switch (5) to on and slide sensitivity to L (6).
5. Power on the device (7) and the blue LED turns on (8).
6. Press the Rec button (9) and the red LED turns on (8).

(5)

7. Replay

1. To reply the recording files, you can connect the supplied microphone (A) or connect the device to PC (B).
2. Power on the device (1) then press the Replay button (2).
3. Press and hold the volume up/down button (3) to adjust the volume.
4. To forward or backward, short press the volume button up/down button (3).

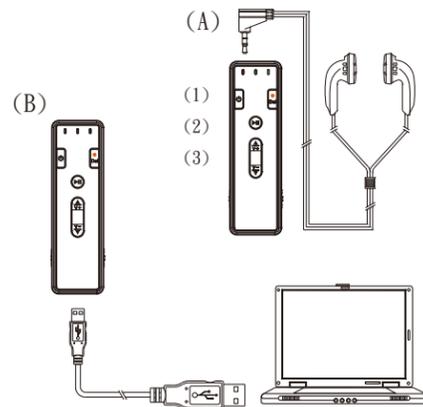


(6)

(7)

AR-200

Mini Audio Recorder Landline Telephone Recorder Quick Guide



Law Enforcement Products Manufacturer
LawMate

V1.0